


## UcD Supply HG Mono

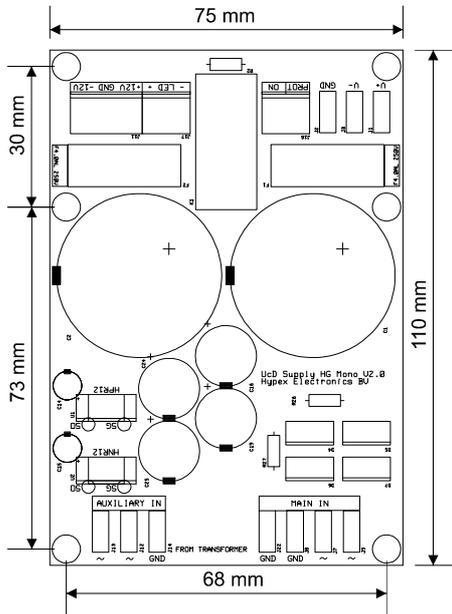

### Features

- For use with single UcD180xx/UcD400xx
- DC-error protection
- LED connection (LED not included)
- Amplifier enable control
- Audiophile Slit-Foil capacitors
- High-speed rectifier bridge
- Optional auxiliary +/-12V Supply

### Applications

- High-End mono/stereo amplifier
- Weight: 210g
- Dimensions: 110mm x 75mm x 55mm

### Caution

CAUTION: REPLACE FUSE WITH SAME TYPE AND RATING.  
 ATTENTION: UTILISER UN FUSIBLE DE RECHANGE DE MÊME TYPE.

DISCONNECT MAINS CORD BEFORE CHANGING FUSE.  
 ATTENTION: DEBRANCHER AVANT DE REMPLACER LE FUSIBLE.

### Warning

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

### Description

The 'UcD Supply HG Mono' is a general purpose power supply for use in a single UcD180xx/UcD400xx application. On-board DC-protection ensures a fast supply switch-off in case of a fatal module fault.

### Absolute maximum ratings

Correct operation at these limits is not guaranteed. Operation beyond these limits may result in irreversible damage.

Item	Min	Typ	Max	Notes
AC input voltage	25V		42V	Hypex TR180/TR400 is recommended
Aux AC input voltage	11	13	24 ( $I_{OUT\ MAX} = 40\text{mA}$ )	
Input frequency	50Hz		60Hz	
Fuses F1, F2			4AF	250V - 5x20mm

**NOTE:** Most transformers may have a considerable higher unloaded output voltage than the label states.

## Connections

Connector	Name	Function
J1	+	Positive power supply connection
J3	-	Negative power supply connection
J2	GND	Power supply ground
J7, J9	~	Transformer AC voltage
J8, J22	0	Transformer centre tap
(J12, J13)	~	Auxiliary transformer AC voltage)
(J14)	0	Auxiliary transformer centre tap)
J16:1	PROT	DC-error connection
J16:2	ON	Amplifier enable
J17:1	LED -	Negative LED connection
J17:2	LED +	Positive LED connection
(J11:1)	+12V	auxiliary positive power supply connection)
(J11:2)	GND	auxiliary power supply ground)
(J11:3)	-12V	auxiliary negative power supply connection)
<b>NOTE:</b> Main and auxiliary GND are NOT connected on the board.		

## Typical Application Schematic

A typical single channel application is shown below.

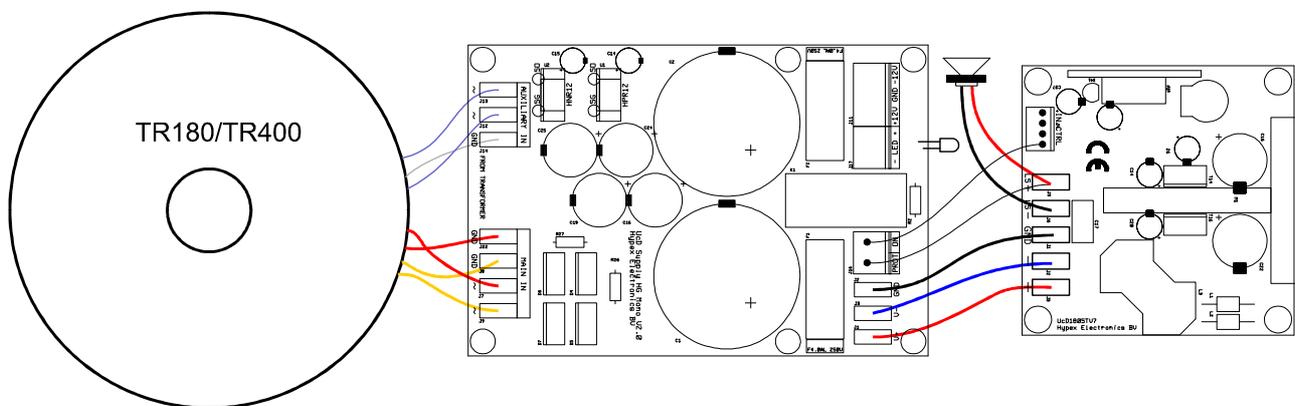


Fig. 1.

UcD Power Supply HG Mono

UcD180xx