

RSS210HO-8

8" Reference HO Subwoofer 8 Ohm





Features

- Heavy gauge black anodized aluminum cone
- 2" 4-layer voice coil
- Fully vented construction
- Triple-shorting-ring motor
- Rigid cast frame
- Rubber surround
- High power handling


Parameters

Impedance (Ω)	8
Re (Ω)	6.2
Le (mH) @ 1 kHz	1.4
Fs (Hz)	28.9
Qms	2.8
Qes	0.46
Qts	0.40
Mms (g)	75.5
Cms (mm/N)	0.40
Sd (cm ²)	213.8
Vd (cm ³)	256.6
BL (Tm)	13.5
VAS (liters)	25.7
XMAX (mm)	12.0
VC Diameter (mm)	50
SPL (dB@1W/1m)	83.3
RMS Power Handling (w)	300
Usable Frequency Range (Hz)	30 - 2,000

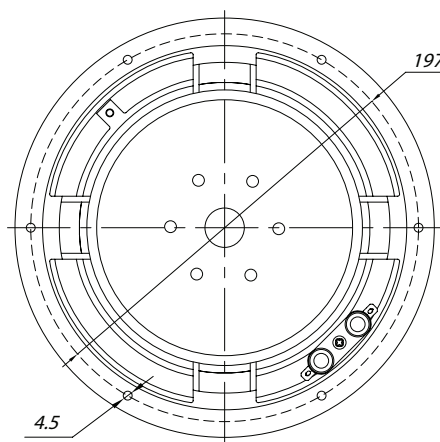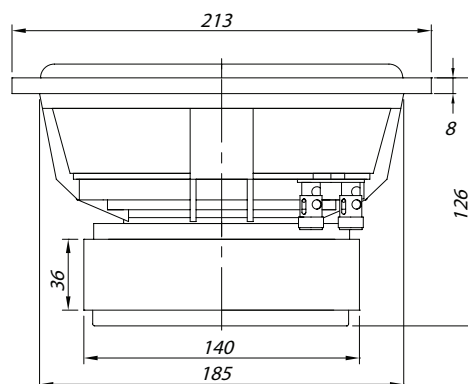

Note: All dimensions in mm.

Frequency Response

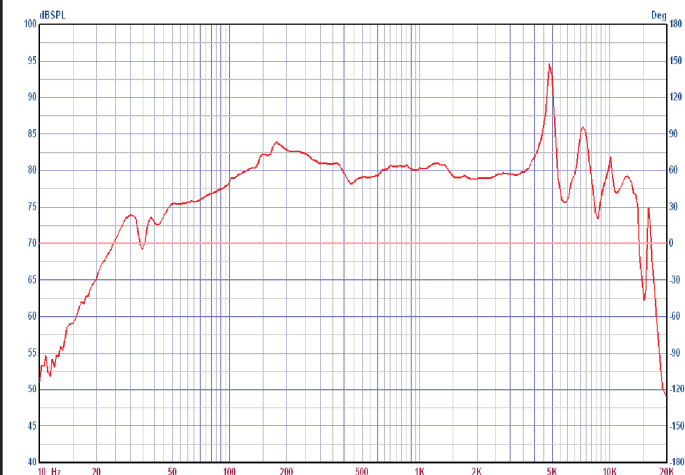

Note: Due to testing limitations, response below 200 Hz is not an actual representation.

Impedance/Phase

