

PS180-8

6.5" Point Source Full Range Driver





Features

- High efficiency
- Substantial excursion
- Low distortion neodymium motor
- Ultra stiff and light Kevlar impregnated paper cone
- Full-range extended to 25k Hz
- Under spider venting
- Excellent off axis response
- Satin nickel spring loaded terminals
- Brushed aluminum raised logo


Parameters

Impedance (Ω)	8
Re (Ω)	6.32
Le (mH) @ 1 kHz	0.69
Fs (Hz)	48.2
Qms	3.86
Qes	0.24
Qts	0.23
Mms (g)	7.2
Cms (mm/N)	1.52
Sd (cm ²)	132.7
Vd (cm ³)	61.1
BL (Tm)	7.6
VAS (liters)	40.4
XMAX (mm)	4.6
VC Diameter (mm)	25.4
SPL (dB@1W/1m)	94.7
RMS Power Handling (w)	30
Usable Frequency Range (Hz)	48 - 25,000

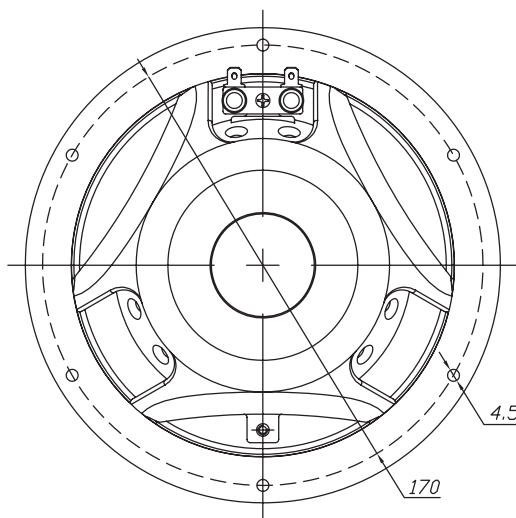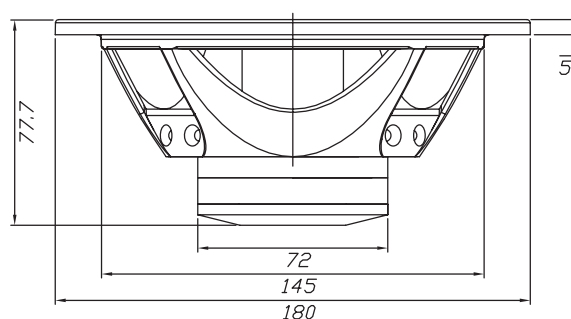

Note: All dimensions in mm.

Frequency Response

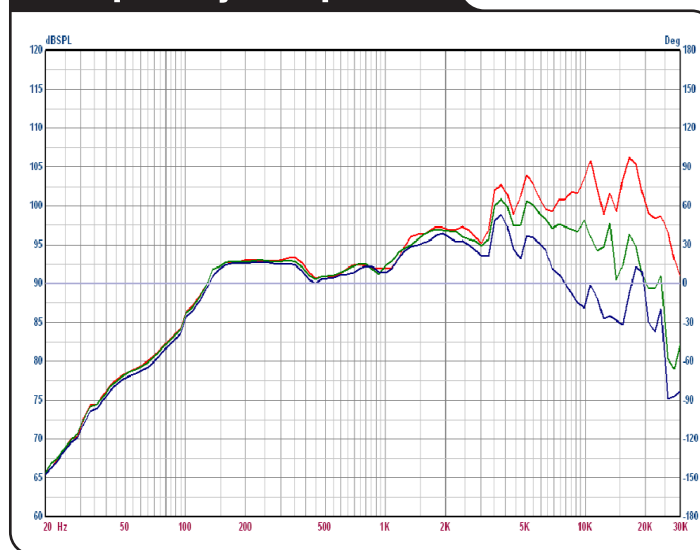

Impedance/Phase

