

PS220-8

8" Point Source Full Range Driver





Features

- High efficiency
- Substantial excursion
- Low distortion neodymium motor
- Ultra stiff and light Kevlar impregnated paper cone
- Full-range extended to 25k Hz
- Under spider venting
- Excellent off axis response
- Satin nickel spring loaded terminals
- Brushed aluminum raised logo


Parameters

Impedance (Ω)	8
Re (Ω)	5.97
Le (mH) @ 1 kHz	0.75
Fs (Hz)	45.5
Qms	3.61
Qes	0.32
Qts	0.30
Mms (g)	10.6
Cms (mm/N)	1.15
Sd (cm ²)	216.4
Vd (cm ³)	99.6
BL (Tm)	7.5
VAS (liters)	79.0
XMAX (mm)	4.8
VC Diameter (mm)	25.4
SPL (dB@1W/1m)	95.6
RMS Power Handling (w)	40
Usable Frequency Range (Hz)	40 - 25,000

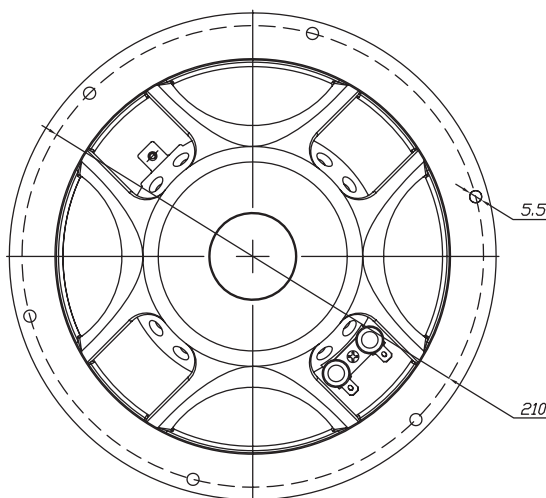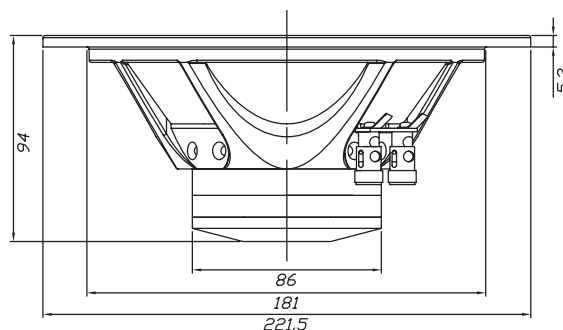

Note: All dimensions in mm.

Frequency Response

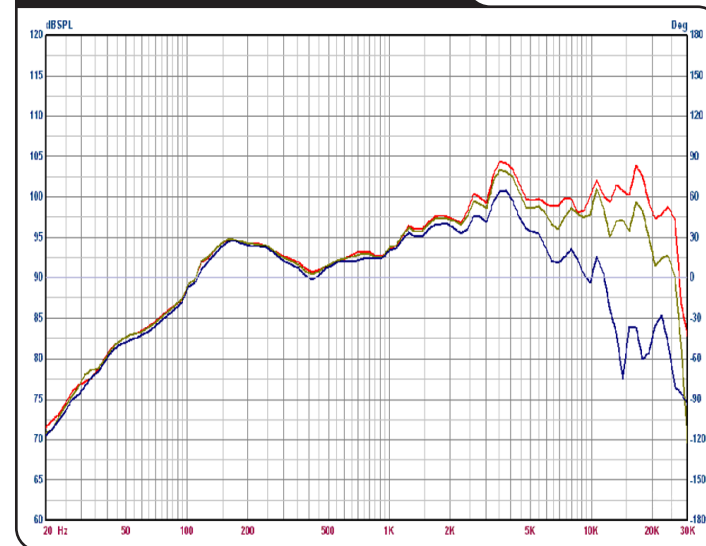

Impedance/Phase

