

RS180-8

7" Reference Woofer





Features

- Lightweight black anodized aluminum cone
- Attractive 6-hole cast frame
- Advanced low distortion motor design
- Solid aluminum phase plug
- Rubber surround


Parameters

Impedance (Ω)	8
Re (Ω)	6.22
Le (mH) @ 1 kHz	0.74
Fs (Hz)	42.4
Qms	1.45
Qes	0.49
Qts	0.37
Mms (g)	14.9
Cms (mm/N)	0.95
Sd (cm ²)	124.7
Vd (cm ³)	74.8
BL (Tm)	7.1
VAS (liters)	20.7
XMAX (mm)	6.0
VC Diameter (mm)	38.5
SPL (dB@1W/1m)	87.0
RMS Power Handling (w)	60
Usable Frequency Range (Hz)	42 - 3,500

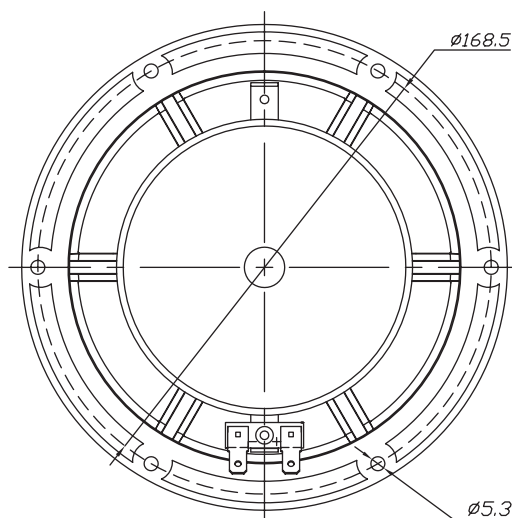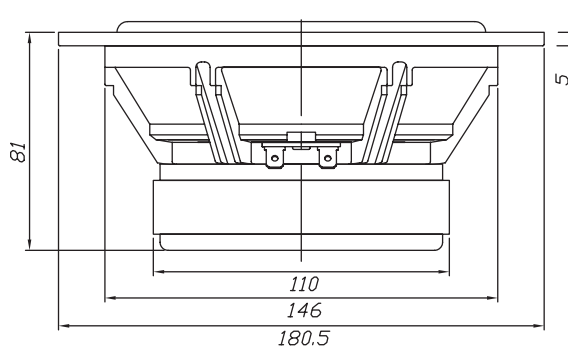

Note: All dimensions in mm.

Frequency Response

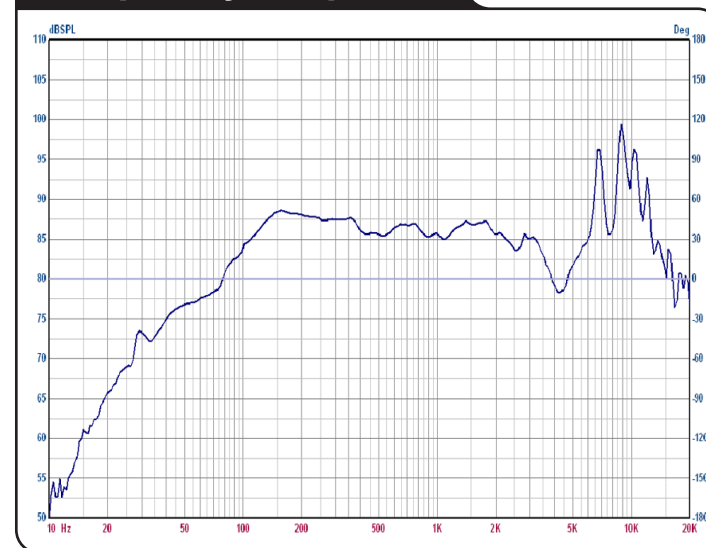

Impedance/Phase

