

RSS265HF-8

10" Reference HF Subwoofer





Features

- Black anodized aluminum cone
- 2-1/2" 2-layer voice coil
- Triple-shorting-ring motor
- Fully vented construction
- Rigid cast frame
- Rubber surround
- High power handling


Parameters

Impedance (Ω)	8
Re (Ω)	6.17
Le (mH) @ 1 kHz	1.48
Fs (Hz)	24.9
Qms	2.89
Qes	0.60
Qts	0.49
Mms (g)	133.4
Cms (mm/N)	0.31
Sd (cm ²)	346.4
Vd (cm ³)	495.3
BL (Tm)	14.7
VAS (liters)	51.6
XMAX (mm)	14.3
VC Diameter (mm)	65.5
SPL (dB@1W/1m)	83.2
RMS Power Handling (w)	350
Usable Frequency Range (Hz)	25 - 2,000

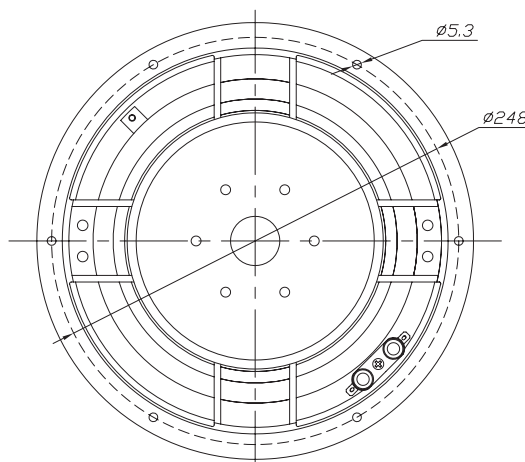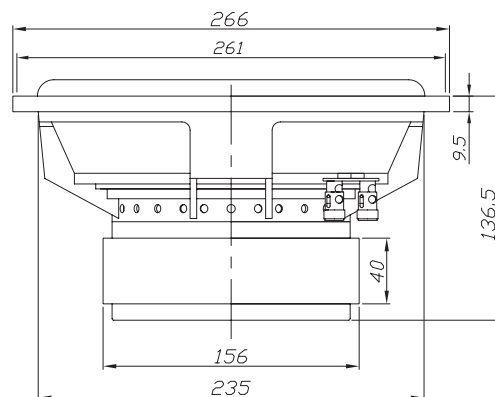

Note: All dimensions in mm.

Frequency Response

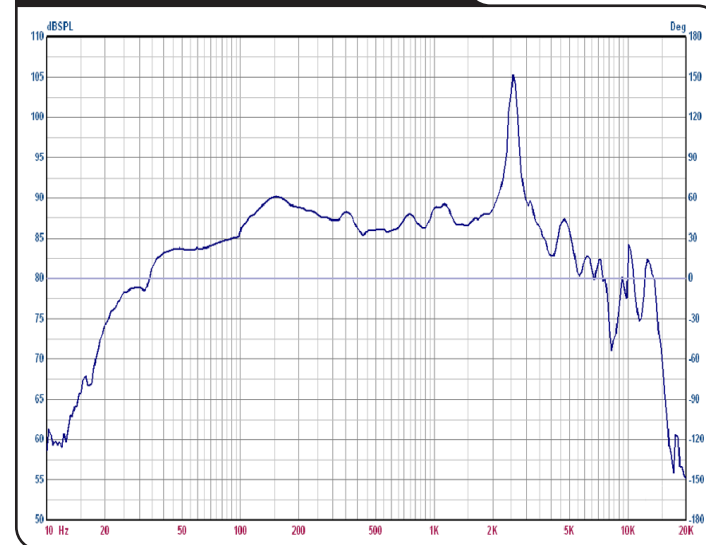

Impedance/Phase

