


Features

- Heavy duty design
- 4-point industrial mounting
- Robust performance

Applications

- Commercial/industrial
- Medical/military
- Automotive

Impedance Plot

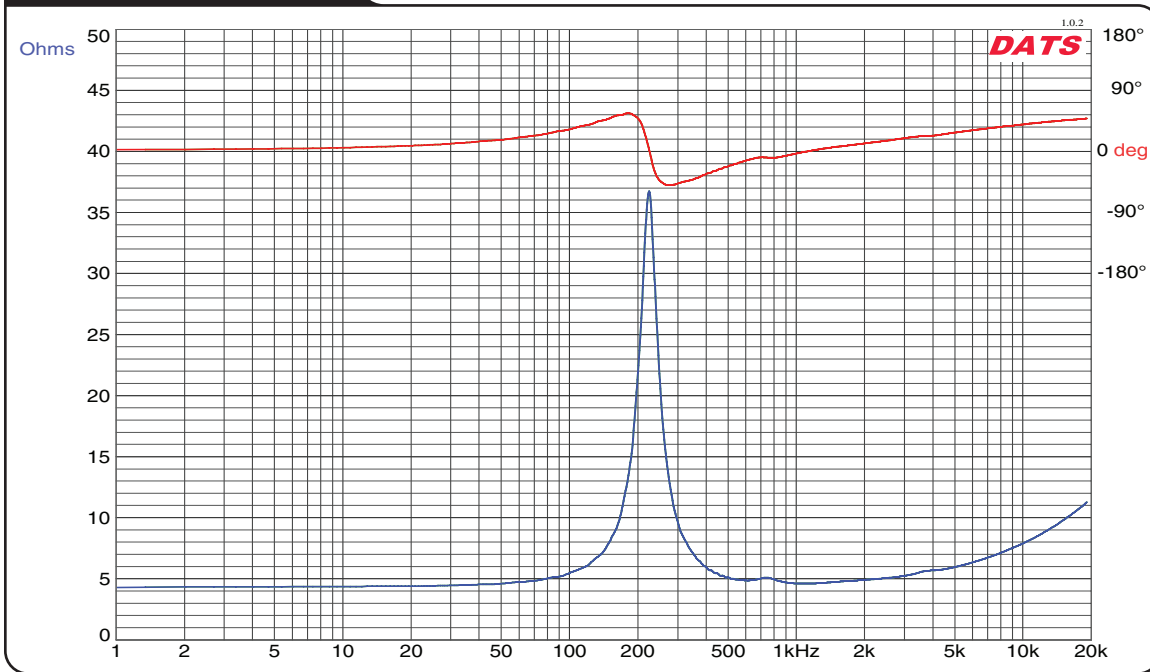

Parameters

Impedance (Ω)	4
Re (Ω)	4.3
Le (mH) @ 1 kHz	0.10
Fs (Hz) - Uncoupled	224
Qms	—
Qes	—
Qts	0.78
Mms (g)	1.61
Cms (mm/N)	0.0003
Sd (cm ²)	—
Vd (cm ³)	—
BL (Tm)	3.63
VAS (liters)	—
XMAX (mm)	—
VC Diameter (mm)	25
Net Weight (g)	110.9
RMS Power Handling (W)	24
Usable Frequency Range (Hz)	*